



ОТКРЫТОЕ АКЦИОНЕРНОЕ ОБЩЕСТВО

“БЕЛГОРОДСКИЙ АБРАЗИВНЫЙ ЗАВОД”
(ОАО “БАЗ”)

ул. Михайловское шоссе, 2а, г. Белгород, 308013, Россия

Тел. (4722) 21-12-42;
факс (4722) 21-34-27; 21-14-20;
e-mail: baz@belabraziv.ru; http://www.belabraziv.ru

ОКПО 00223332; ОГРН 1023101649174;
ИНН/КПП 3125008314/312301001

JOINT STOCK COMPANY

“BELGOROD ABRASIVE PLANT”
(JSC “BAP”)

str. Mikchaylovskoye shosse, 2a, Belgorod, 308013, Russia

Тел. (4722) 21-12-42;
fax (4722) 21-34-27; 21-14-20;
e-mail: baz@belabraziv.ru; http://www.belabraziv.ru

ОКПО 00223332; ОГРН 1023101649174;
INN/KPP 3125008314/312301001


Dear Sirs,

Please consider possibility of cloth production according of these features. In case of positive answer please send your answer to e-mail – cherkasov@belabraziv.ru, translator2@belabraziv.ru.

№	Name	Technical requirements
1	Interweaving	S 2/1
2	Surface density, g/m ²	275 ± 10
3	Number of threads for 10 cm: By warp By weft	350 ± 5 190 ± 5
4	Breaking load of cloth strip with dimension 50 x 200 mm N (kgs), no less than: By warp By weft	1275 (130) 441 (45)
5	Elongation during breaking of strip with dimension 50 x 200 mm, %, no more than By warp By weft	19 15
6	Cloth thickness by background, mm On thickness gage TH 10-10M On micrometer MK	0,55 ± 0,05 0,43 ± 0,03
7	Cloth width, cm	170 ± 1,0
8	Weft cocking, %, no more than	2,0
9	Cloth composition, %	Yarn, 100 % cotton
10	Threads structure, tex By warp By weft	50 36
11	Yarn number By warp By weft	20 28
12	Rate cloth humidity, %	7,0
13	Cloth length in roll, no less that l.m.	500 (its allowed till 10 % With length 200 - 500)

See pictures for fabric view - front side and back side below.

Front side

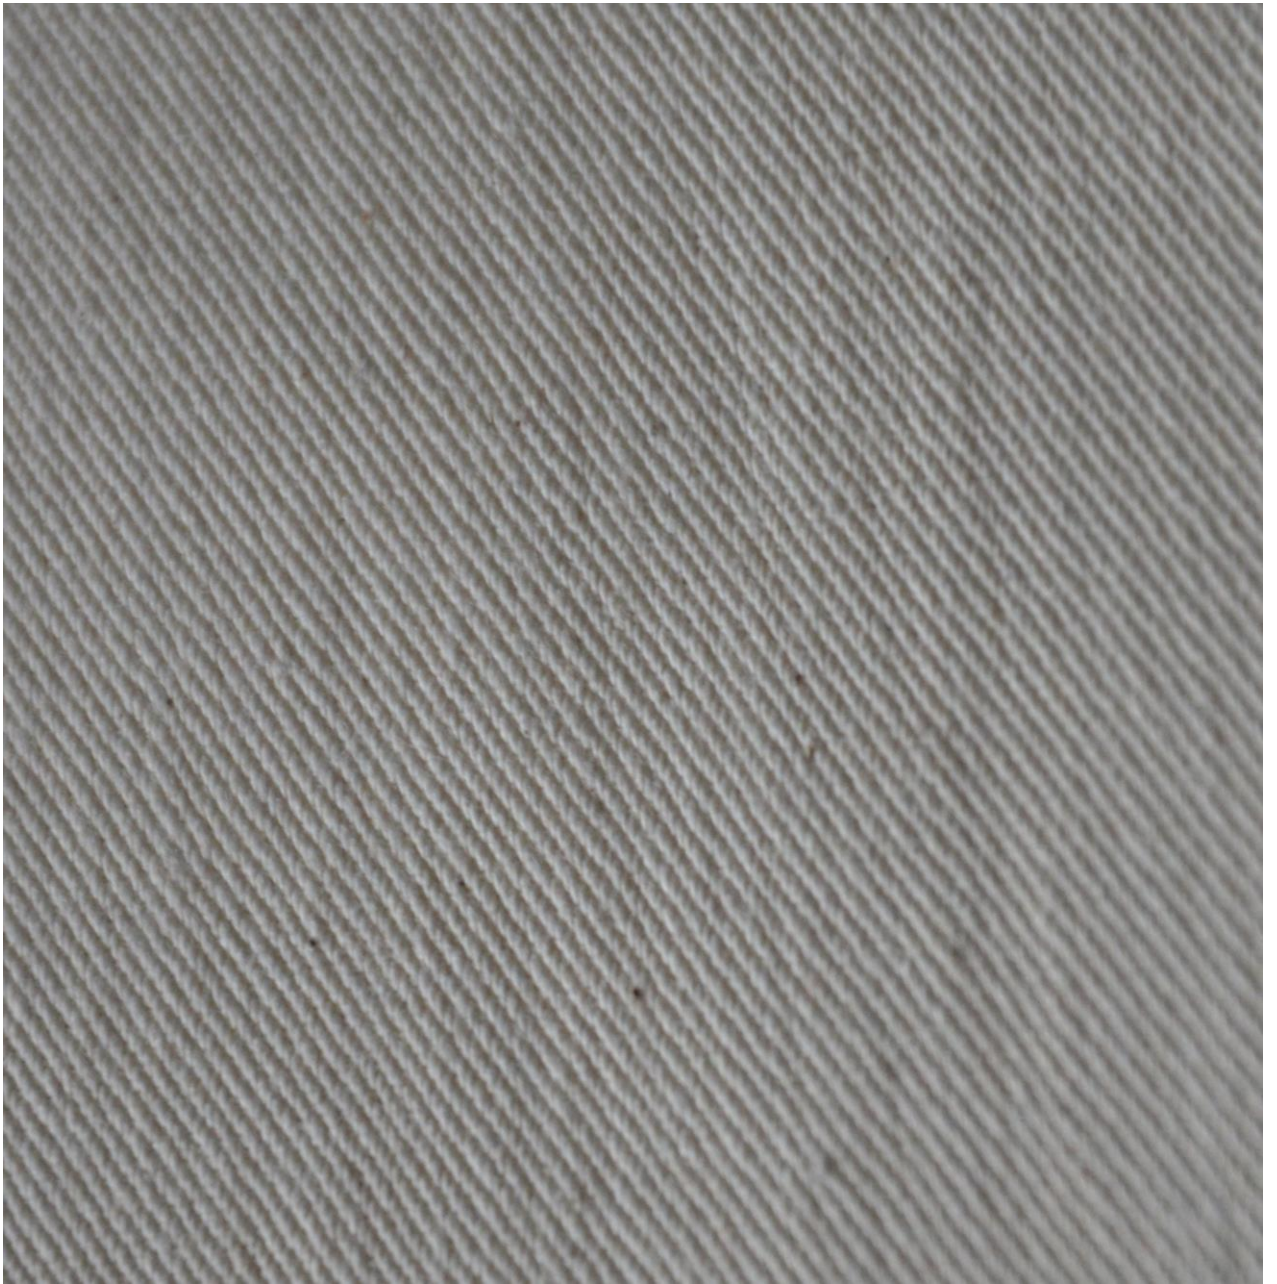

Backside

